




US 20200376309A1

(19) **United States**(12) **Patent Application Publication**
Brooker(10) **Pub. No.: US 2020/0376309 A1**(43) **Pub. Date: Dec. 3, 2020**(54) **FLAME ARRESTER/BURNER ASSEMBLY
WITH A MULTIFARIOUS ELEMENT FOR
PREVENTING DEFLAGRATIONS AND
EXTENDED ENDURANCE BURNING TIME**(52) **U.S. Cl.**CPC *A62C 4/04* (2013.01); *F23G 7/085*
(2013.01); *F23D 91/00* (2015.07)(71) Applicant: **Dwight Brooker**, Chiefland, FL (US)

(57)

ABSTRACT(72) Inventor: **Dwight Brooker**, Chiefland, FL (US)(21) Appl. No.: **16/794,201**(22) Filed: **Feb. 18, 2020****Related U.S. Application Data**(60) Provisional application No. 62/806,527, filed on Feb.
15, 2019.**Publication Classification**(51) **Int. Cl.***A62C 4/04* (2006.01)
F23D 99/00 (2006.01)

A flame arrester/burner assembly with a multifarious arrester element for preventing deflagrations and extended endurance burning time (FABA-XT). The multifarious element flame arrester includes a pipe body having a first end and a second end, a first arrester element positioned within the pipe body adjacent the top end; a third arrester element adjacent the bottom end; and, a second arrester element positioned in the pipe body between the first arrester element and the second arrester element. The first, second, and/or third arrester elements may be of the same design or disparate designs. The FABA-XT of the present disclosure is an end-of-line burner element for use in VOC-Vapor Destruction Systems.

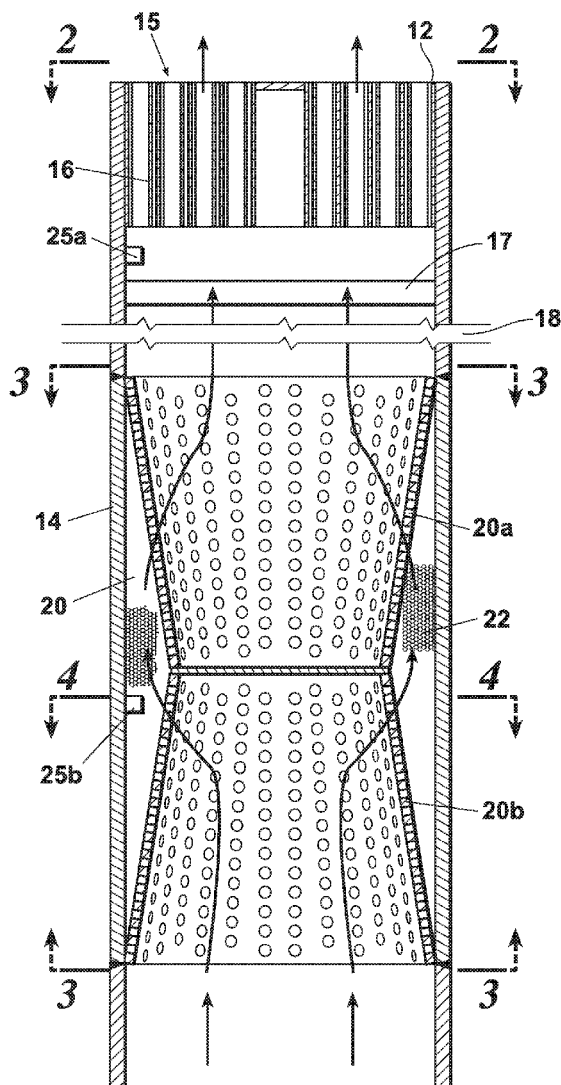

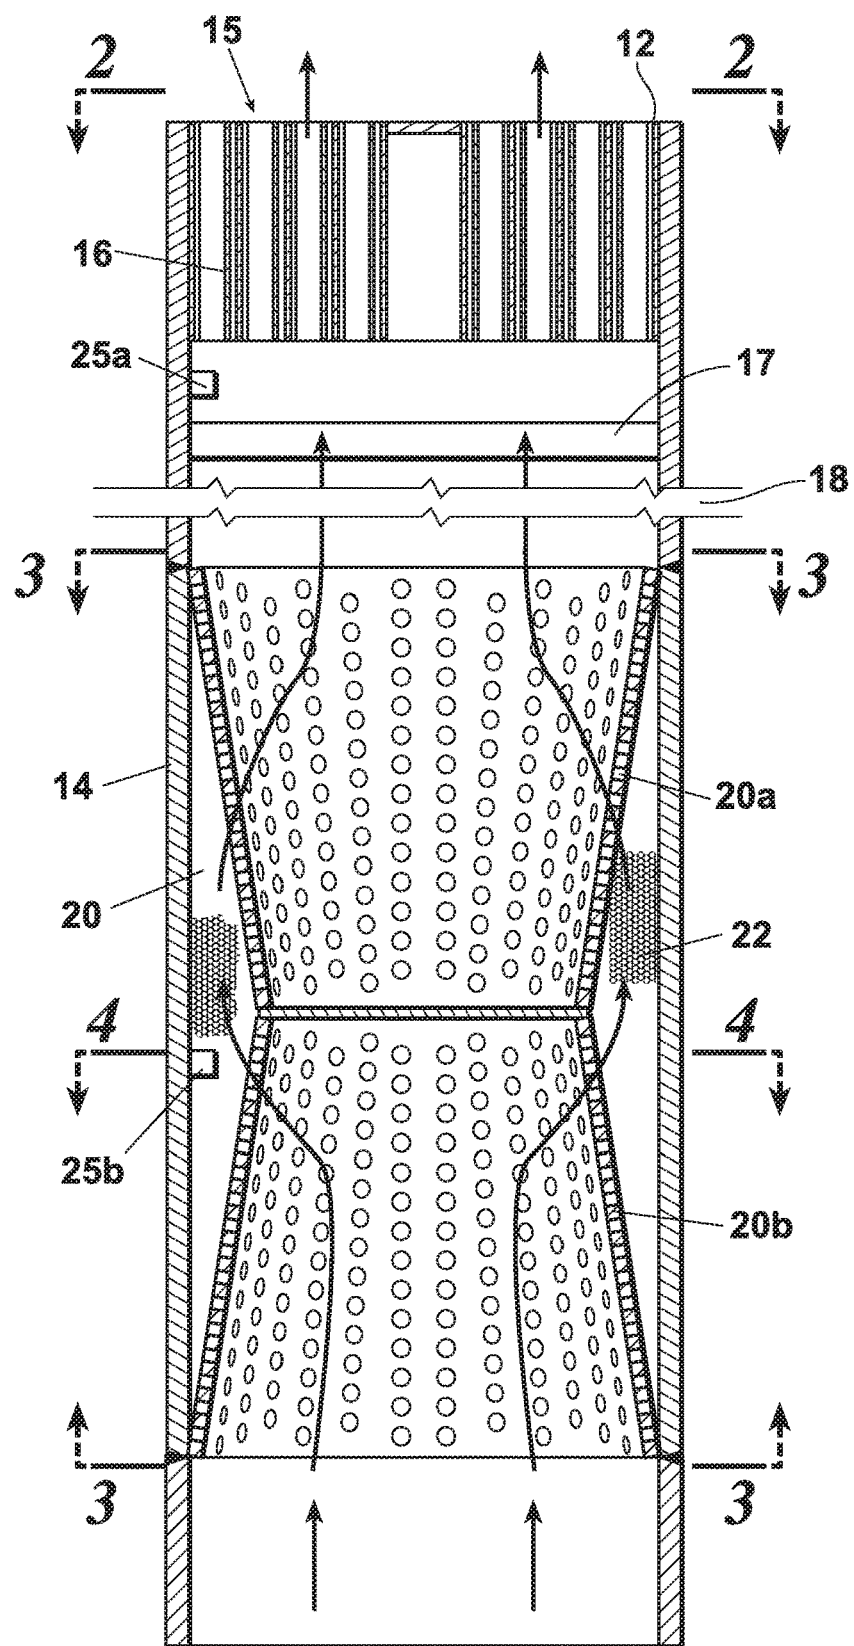


Fig. 1

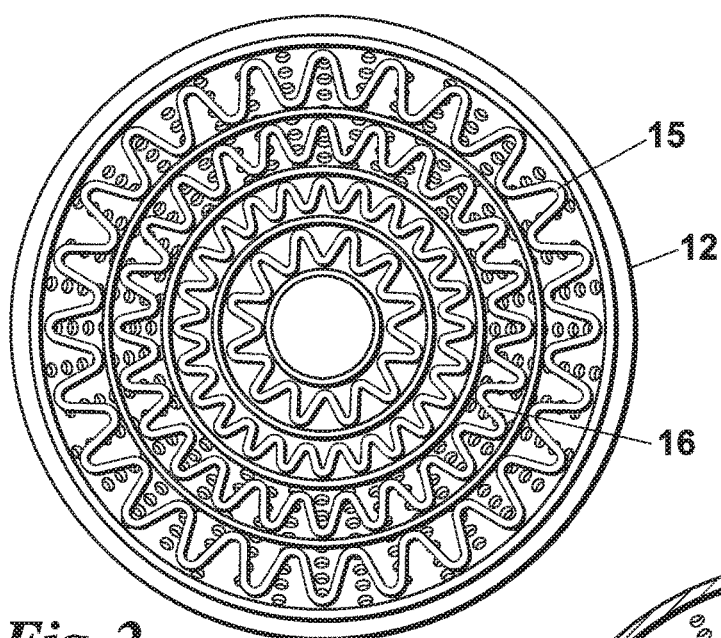


Fig. 2

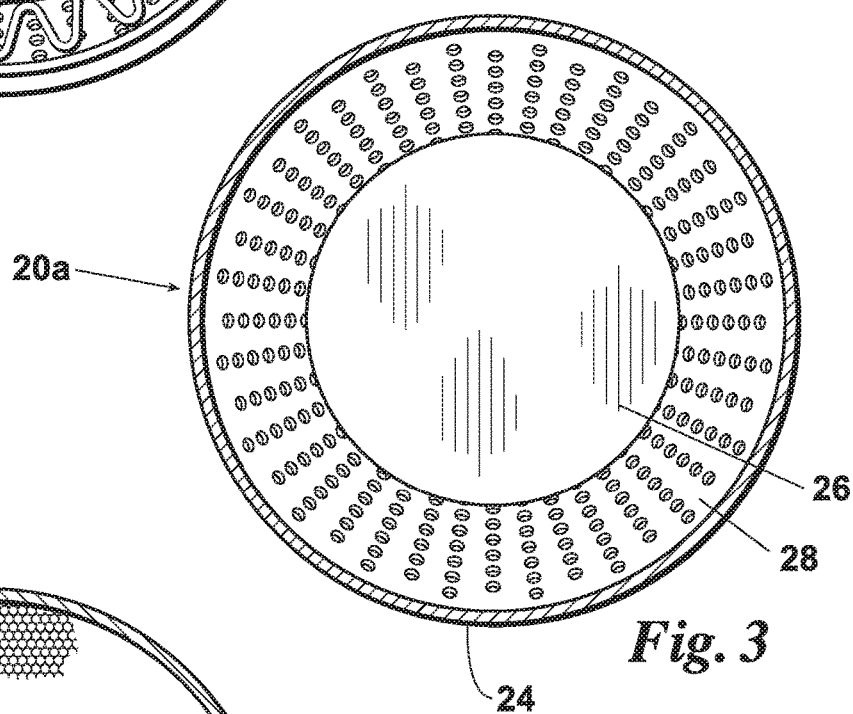


Fig. 3

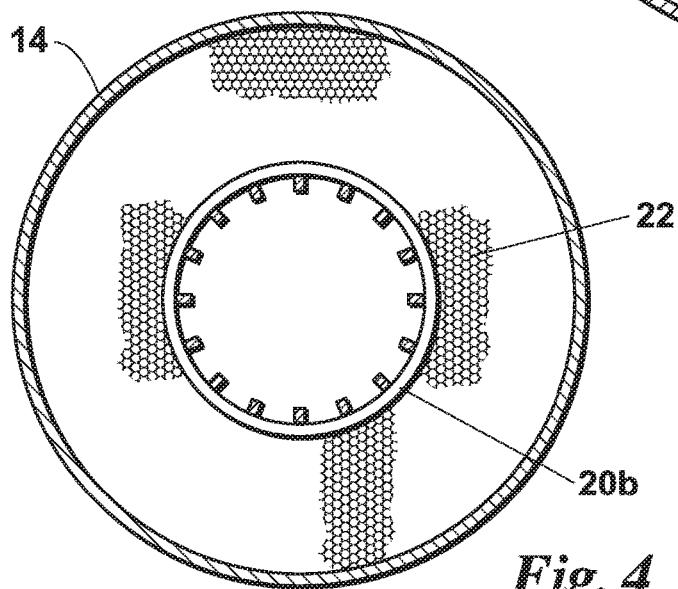


Fig. 4

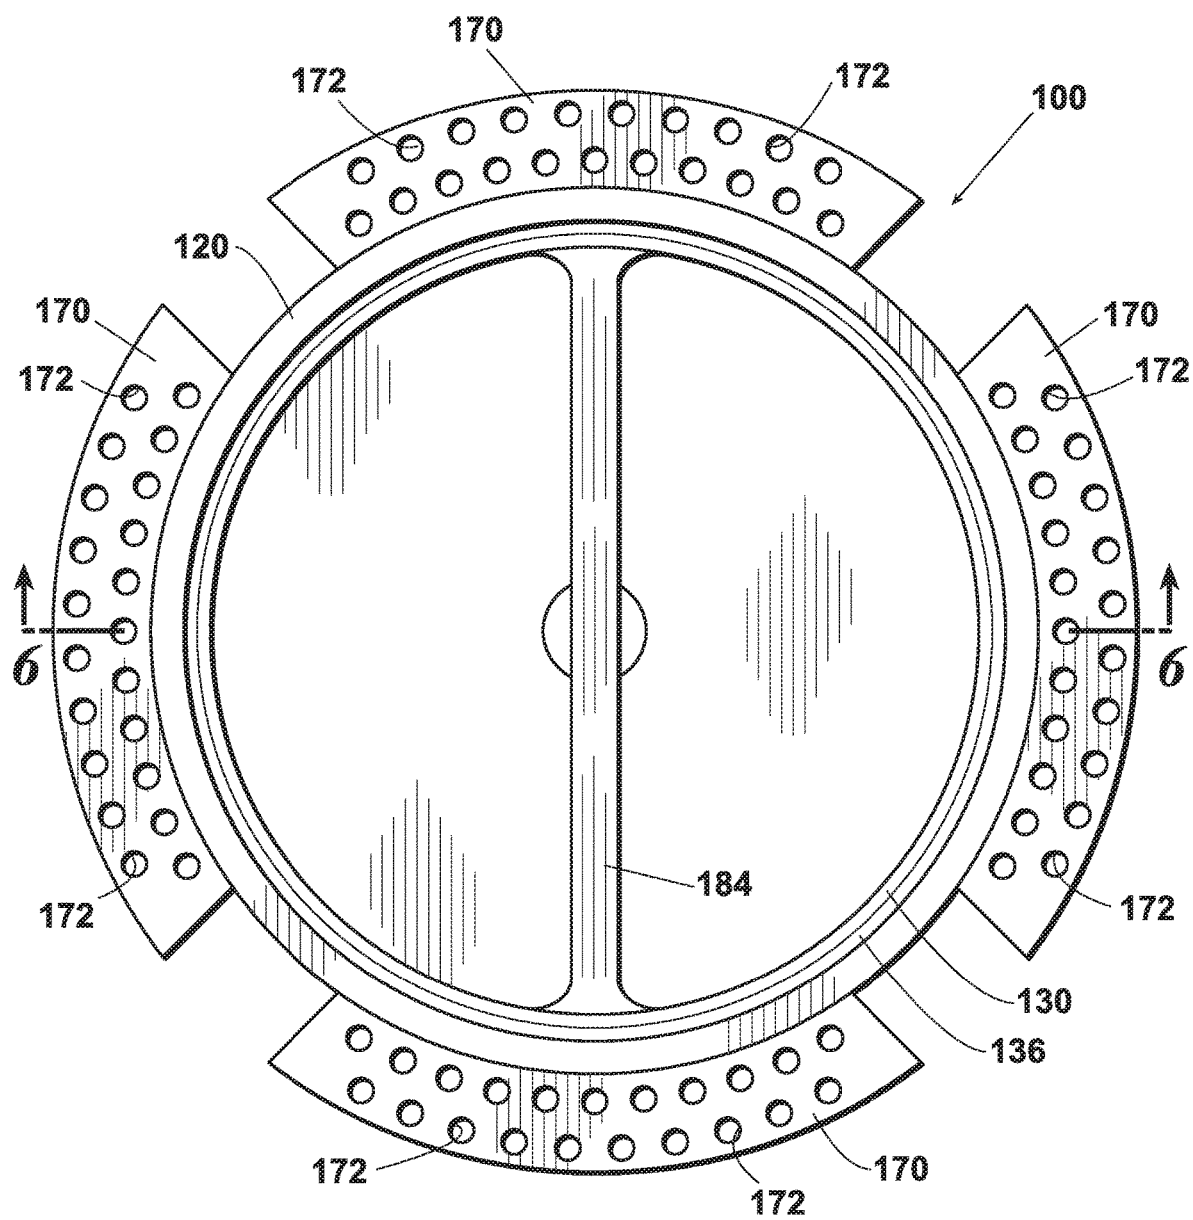
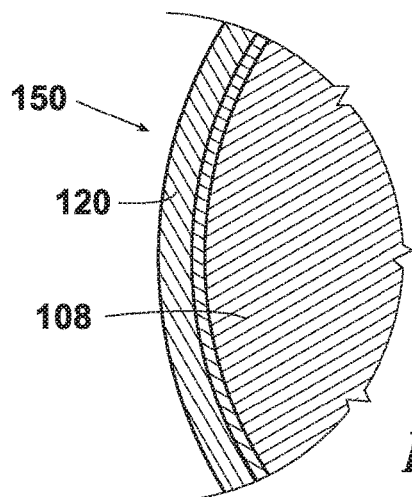


Fig. 5



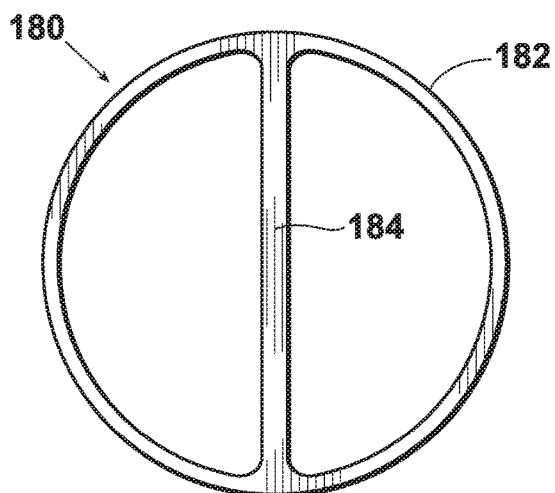


Fig. 7

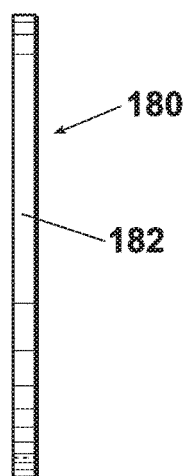


Fig. 8

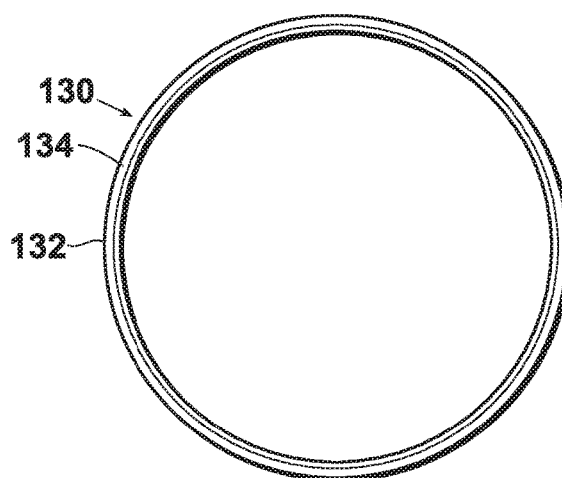


Fig. 9

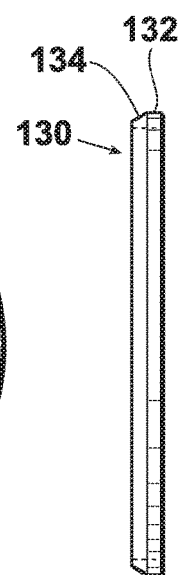


Fig. 10

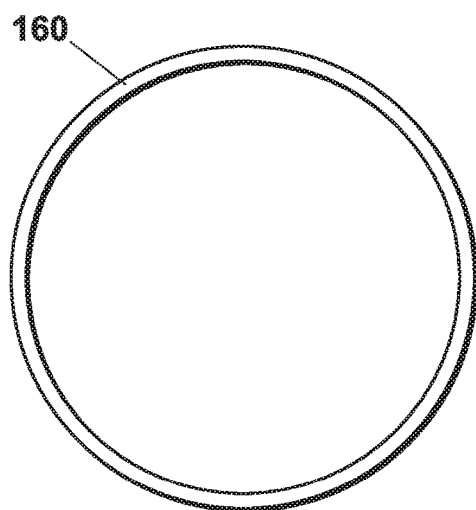


Fig. 11



Fig. 12

**FLAME ARRESTER/BURNER ASSEMBLY
WITH A MULTIFARIOUS ELEMENT FOR
PREVENTING DEFLAGRATIONS AND
EXTENDED ENDURANCE BURNING TIME**

**CROSS REFERENCE TO RELATED
APPLICATION**

[0001] This application claims the benefit of U.S. Provisional Application No. 62/806,527 filed Feb. 15, 2019, and incorporates such provisional application by reference into this disclosure as if fully set out at this point.

FIELD OF THE INVENTION

[0002] The present invention relates to the field of flame arresters, generally, and combined flame arrester and burner assemblies more particularly.

BACKGROUND OF THE INVENTION

[0003] The vapor destruction systems currently in use employ an open flame to burn volatile organic compound (VOC) vapors and any enrichment gas routed to it. In most installations, the flame is contained inside a large refractory lined cylindrical stack with the burner mounted near the base of the stack, an enclosed design. In other applications the burner is mounted at the top of an elevated riser and not contained in a stack, a visible flame design.

[0004] At this time, the major manufacturers of VOC-Vapor Destruction Systems use these types of burner technologies. Depending on the capacity of the vapor control system, from one to ten burners are used for these combustion systems. Typically, air is forced directly around the perimeter of each burner to keep it cool. Additionally, this air provides turbulence to the waste gas stream to maintain smokeless combustion, which is required by air pollution regulatory authorities.

[0005] Test Procedures for Current Configurations of Flame Arrester Burners

[0006] Currently, there are no United States Coast Guard (USCG) test procedures approved that establish a design for flame arrester burners used in vapor destruction devices. However, exemptions for the elimination of the Liquid Seal required by 33 C.F.R. § 154.828(b) have been granted IF a flame arrester burner is utilized. This approval has been granted, on a case-by-case basis, and as such the typical flame arrester burner designs have a proven track record. These burners along with USCG approved (Appendix A) detonation arresters and temperature sensing devices have been approved at many locations. Title 33 C.F.R. § 154.828 (b) does allow the use of USCG approved inline flame arrestors, but it is believed that there are no USCG approved inline flame arrestors currently known in the art. Appendix A and 33 C.F.R. § 154.828(b) are incorporated fully herein by reference.

SUMMARY OF THE INVENTION

[0007] The Flame Arrester/Burner Assembly with a Multifarious Element for Preventing Deflagrations and Extended Endurance Burning Time (FABA-XT) of the present disclosure is designed as an end-of-line burner element for use in VOC-Vapor Destruction Systems. The FABA-XT can be used in either an enclosed design or a visible flame design.

[0008] Proposed Service of the FABA-XT

[0009] The intended service of the FABA-XT is as a replacement for three (3) components currently used on Vapor Destruction Units. A large, flame arrester installed in close proximity to the combustion unit (approximately ten to twelve inches from the burner tip).

[0010] One embodiment of a multifarious flame arrester of the present invention includes: a pipe body having a top end and a bottom end; a first arrester element positioned within said body adjacent said top end; a third arrester element positioned within said body adjacent said bottom end; and, a second arrester element positioned within said body between said first arrester element and said third arrester element.

[0011] The first, second, and/or third arrester elements may be of the same design or disparate designs. In one preferred embodiment, the first, second, and third arrester elements are disparate designs and in another preferred embodiment the first, second, and/or third arrester elements are of the same design. It is understood that the first and second, second and third, or first and third arrester elements may be the same of different, and may be the same or different than the other.

[0012] In one preferred embodiment, the first, second, and third arrester elements may be disparate. This embodiment may include a first single element (crimped ribbon) flame arrester segment, a second, ceramic element; and, a third arrester element including a basket shaped element or two such elements joined to make an hourglass design around which media may be placed.

[0013] In another preferred embodiment, the first, second and third arrester elements are of the same design, such as a crimp ribbon construction. These arrester elements are secured within the pipe body.

[0014] Temperature sensing element(s) may be mounted near any or all of the arrester elements or in any other desired location to monitor the flame temperature

[0015] It is contemplated that the use of the FABA-XT incorporating a temperature sensing device between the elements performs better than the prior art configurations discussed above. This is because there is no run-up distance between the first flame arresting element and the second deflagration arrester element since they are so closely coupled. The compact design eliminates the potential for a high-speed deflagration or sonic/supersonic detonation. The "Extended Endurance Burning Time" of the FABA-XT corrects a critical deficiency present in a Single element (crimped ribbon) flame arrester burner tip and adds an unmeasurable performance margin to the installations that these phenomena occur in.

[0016] The foregoing has outlined in broad terms the more important features of the invention disclosed herein so that the detailed description that follows may be more clearly understood, and so that the contribution of the instant inventors to the art may be better appreciated. The instant invention is not limited in its application to the details of the construction and to the arrangements of the components set forth in the following description or illustrated in the drawings. Rather the invention is capable of other embodiments and of being practiced and carried out in various other ways not specifically enumerated herein. Additionally, the disclosure that follows is intended to apply to all alternatives, modifications and equivalents as may be included within the spirit and the scope of the invention as defined by the

appended claims. Further, it should be understood that the phraseology and terminology employed herein are for the purpose of description and should not be regarded as limiting, unless the specification specifically so limits the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0017] FIG. 1 is a side vertical cut-away view of the flame arrester/burner assembly of the present invention.
- [0018] FIG. 2 is a view taken along line 2-2 of FIG. 1.
- [0019] FIG. 3 is a view taken along line 3-3 of FIG. 1.
- [0020] FIG. 4 is a view taken along line 4-4 of FIG. 1.
- [0021] FIG. 5 is a top view of the flame arrester/burner assembly of the present invention with the burner vanes removed.
- [0022] FIG. 6 is a cut-away side view taken along line 6-6 of FIG. 5.
- [0023] FIG. 7 is a top plan view of the burner media retainer of the arrester/burner assembly of the present disclosure.
- [0024] FIG. 8 is a side view of the burner media retainer of FIG. 7.
- [0025] FIG. 9 is a top plan view of the beveled top retaining ring of the arrester/burner assembly of the present disclosure.
- [0026] FIG. 10 is a side view of the beveled top retaining ring of FIG. 9.
- [0027] FIG. 11 is a top plan view of the bottom retaining ring of the arrester/burner assembly of the present disclosure.
- [0028] FIG. 12 is a side view of the bottom retaining ring of FIG. 11.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0029] The embodiments herein and the various features and advantageous details thereof are explained more fully with reference to the non-limiting embodiments that are illustrated in the accompanying drawings and detailed in the following description. Descriptions of well-known components and processes and manufacturing techniques are omitted so as to not unnecessarily obscure the embodiments herein. The examples used herein are intended merely to facilitate an understanding of ways in which the invention herein may be practiced and to further enable those of skill in the art to practice the embodiments herein. Accordingly, the examples should not be construed as limiting the scope of the claimed invention.

[0030] Burner/Arrester Description

[0031] The FABA-XT of the present disclosure includes up to 4 separate flame/deflagration suppression matrices closely coupled within a single burner. The four matrices are preferably combined into two separate elements 15 (element 15 includes matrices 16 and 17) and 20 (element 20 includes matrices 20a, 20b, and 22 which combined make one single element 20) or four individual matrices 16, 17, 20a, 20b and 22, working together or separately depending on the application & extended burn time required. These four matrices make-up the arrester/burner design 10 of the present disclosure in a preferred embodiment of FIG. 1.

[0032] The first matrix is the visible element 16 at the burner tip 12. Its configuration is of preferably a crimped ribbon design known for use in “anti-flashback” or “anti-

burn-back” burner elements. The concentric crimped ribbon matrix 16 can be seen in FIG. 1 taken in combination with FIG. 2.

[0033] The second matrix 17 may be either a second (third, or more) crimp ribbon element(s) (same as matrix 16 of FIG. 2) or, in a most preferred embodiment, a porous ceramic disk (or similar low thermal conductive materials) or a combination of crimp ribbon and ceramic disk matrices. The second matrix 17 is the first line of defense against an extended burn. For this purpose a porous low thermally conductive material such as a porous ceramic disk (FIG. 5) is particularly suited. Representative examples of this matrix can be seen in FIG. 5. This second matrix 17 can be left out of the design in a more basic embodiment if the extended burn time for that application isn’t required and replaced with a second (or more) crimped ribbon section (such as 16 of FIG. 2) or left out altogether if pressure is a higher priority than the added burn time performance.

[0034] The third matrix is formed by the combination of basket shaped matrices 20a and 20b. Basket shaped matrices 20a and 20b are preferably screen covered perforated baskets with maximum free flow area (100% preferred). With reference to FIG. 3 taken in combination with FIG. 1, basket shaped matrix 20a includes an open top 24 and a closed bottom 26. Basket shaped matrix 20a includes a substantially frustoconical geometry in a preferred embodiment with a perforated circumference 28 to allow passage of VOC vapors. The screen allows the passage of gas but prevents the passage of media 22 (discussed below) from passing there-through and into basket 20a.

[0035] Basket shaped matrix 20b is preferably constructed substantially the same as basket shaped media 20a but inverted within housing 14. Basket shaped matrices 20a and 20b can alternatively be made from screen covered wedge-wire forming baskets may be formed as a single unit.

[0036] The fourth matrix is preferably comprised of a porous medium 22 formed by roundish shaped filler media that can be made from either cut wire metal shot or in this preferred embodiment ceramics shot or beads. Medium 22 is porous so as to allow the passage of gas (VOC vapors) to pass therethrough as shown by the flow path arrows depicted in FIG. 1.

[0037] Basket shaped matrices 20a, 20b and porous media 22 which combine to form third element 20 are located within the burner housing 14 and are within close proximity (within 14", 12", 10", 8" or as any size in between as shown at 18) to the first and second matrices 16 and 17. Basket shaped matrices 20a and 20b when combined with cut wire shot in porous media 22 have been shown to prevent the passage of high pressure fronts.

[0038] As stated, third matrices 20a and 20b and fourth matrix 22 combined form a single element of the arrester/burner 10 of the present disclosure. Matrices 20a, 20b and 22 are fabricated of materials that are more substantial than the crimped ribbon matrix 16 and are designed to withstand a flame front traveling from the combustion zone at or near burner tip 12 through element 15 in the event of its failure. Because the distance between matrices 16 and 17, as well as element 20 is so short (18) there is an inadequate length of piping to have run-up distance that could generate a high deflagration pressure front(s) if the matrix 16 and/or 17 fails. Porous medium 22 can be configured to utilize either metal filler for higher pressure deflagration fronts or material like ceramics or similar low thermal conductive material that

will extend the burn time, while at the same time preventing the propagation of a deflagration.

[0039] In one preferred embodiment, a temperature-sensing device **25a** is mounted between the two matrices **16** and **17** and/or within **25b** element **20** (within enclosure **14**) to indicate a failure of the first element **15** and possibly second element **20**.

[0040] Maintaining a known waste gas exit arrangement is preferable because there is a large amount of operational history and practical knowledge on the destruction efficiency and combustion characteristics of that design with the manufacturers.

[0041] Next with reference to FIGS. **5** and FIG. **6**, an alternate preferred embodiment of the burner/arrester assembly of the present disclosure shall next be described. This embodiment includes a flame arrester/burner assembly **100** including a multifarious element **102**. In this embodiment, multifarious element **102** is comprised of three separate crimped ribbon segments **104**, **106**, and **108**. Each separate crimped ribbon segment **104**, **106**, and **108** represents a separate and discrete arrester element. In this embodiment element **108** is on the bottom upon which element **106** is stacked. Element **104** is then stacked upon element **106**. In this embodiment, however, there are no gaps or spaces between respective elements **104**, **106**, and **108**.

[0042] In one embodiment, the assembly and the process for assembly of flame arrester/burner assembly **100** shall next be described. Pipe **120** is a length of stainless steel pipe suitable for flame arrester construction in a burner application. In an 8 inch embodiment, pipe **120** includes in inner diameter (ID) of 8 inches. Pipe **120** is preferably threaded along surface **124** adjacent end **126**. For an 8 inch pipe example, such threads would be 8 NPT pipe threads.

[0043] Bottom retaining spacer **160**, shown particularly in FIGS. **11** and **12**, is a section of cylindrical tubing cut and machined from a longer section of suitable stainless steel tubing. Bottom retaining spacer **160** is cut and machined so as to have an outer diameter (OD) which can be inserted into pipe **120** with substantially an interference fit. Once in place, bottom retaining spacer **160** is welded around its bottom circumference to pipe **120** facing the bottom/inlet end **126** of pipe **120**.

[0044] Single bar retaining rings, collectively **180**, and shown particularly in FIGS. **7** and **8**, are substantially identical. Each single bar retaining ring is comprised of a substantially annular ring **182** substantially bisected by a bar segment **184**. Each single bar retaining ring **180** is machined out of a stainless steel plate and each of a diameter so as to be inserted into pipe **120** with an interference fit. The bottom single bar retaining ring is inserted into pipe **120** from the top **128** and positioned so as to abut bottom retaining spacer **160**.

[0045] Arrester elements **104**, **106**, and **108** of multifarious element **102** are each manufactured separately and are preferably separate units. Each of elements **104**, **106**, and **108** are substantially identical and are formed by winding crimp ribbon around a center arbor **110** of preferably stainless pipe. The open ends of arbor **110** are plugged with stainless plugs and wrapped with stainless flat wraps. Crimp ribbon is then wound around arbor **110** in a consistent manner tightly but not too tightly so as to flatten out the crimps of the crimp ribbon. The cylindrical circumference of each element is tack welded so as to prevent sliding or telescoping. In this way consistent gas/fluid flow/pressure

drop through the element is maintained. Once the desired diameter is obtained, stainless flat wrap is wrapped around the cylindrical circumference of the wound element. The wrap is wound tightly but again not too tightly so as to flatten out the crimps of the crimp ribbon.

[0046] For quality control purposes, a series of measurements of the hydraulic diameter of the windings of the crimp ribbon. A standard pin gauge available commercially is used for this measurement. Measurements are taken at predetermined points on each end of each finished cylindrical ends of elements **104**, **106**, and **108**. In a preferred arrangement, 8 such measurements are taken at predetermined locations on each end of each element. Each measurement must be within the allowed tolerance of the gas group for which the flame arrester is to be employed for the element to pass inspection. If all measurements are within the standard tolerance for the gas group, the element passes QC inspection. Each measurement is recorded for each element and retained. Once the element is complete and passes QC inspection, it is assigned a serial number. Each measurement is recorded and tracked by the element serial number. This procedure is performed for each element wherein each element, such as **104**, **106**, and **108**, is assigned a serial number for which each measurement is recorded, retained and tracked. Thus, for multifarious element **102**, three serial numbers are assigned, one for each of the three crimp ribbon elements **104**, **106**, and **108** and 16 separate pin gauge measurements are recorded and tracked for each. The element serial numbers are marked on a, preferably, stainless steel label which will ultimately be permanently affixed to the outside of pipe **120**. The element serial numbers are tracked along with the Purchase Order of the customer and provided to the customer as a part of a manual specific to the customer purchaser order and specific arrester **100** provided thereunder.

[0047] Once assembled and passed QC inspection, elements **104**, **106**, and **108** is respectively, successively inserted into pipe **120**. The diameter of elements **104**, **106**, and **108** is predetermined so that each successive element slidably fits within pipe **120**. First element **108** is slidably fit within pipe **120** such that it rests against lower single bar retaining ring **180** and welded to bar segment **182** of bottom single bar retaining ring **180** such that no space or gaps are present. Next, element **106** is slidably fit into pipe **120** such that it rests against element **108** such that no gaps or space is present. Finally, element **104** is slidably fit into pipe **120** such that it rests against element **106** such that no space or gap is present. Thus elements **108**, **106**, and **104** are each fit within pipe **120** with no gaps or space to form multifarious element **102**.

[0048] In addition, the arrangement of elements **108**, **106**, and **104** should be selected such that the surfaces of their respective windings at the interfaces between elements do not align. With this non-alignment and lack of a space or gap, it has been determined that a test flame front stalls out at these non-aligning interfaces, see Table 1, below.

[0049] Installation of multifarious element **102** into pipe **120** is followed by a top single bar retaining ring **180**. As stated above, top single bar retaining ring **180** is substantially identical to bottom single bar retaining ring **180**. Top single bar retaining ring **180** is inserted into pipe **120** such that it rests against element **104** of multifarious element **102**. Top single bar retaining ring **180** is positioned so that bar segment **184** shadows, or is symmetrical with, the position

of bar segment **184** of bottom single bar retaining ring **180**. This reduces restriction of gas flow, and thereby pressure drop across element **100**. Once positioned, bar segment **184** is welded to the central arbor **110** of element **104**.

[0050] Beveled top retaining spacer **130** is last to be inserted into pipe **120**. With specific reference to FIGS. **9** and **10**, beveled top retaining spacer **130** has an annular ring geometry, similar to bottom retaining spacer **160** except that it includes a cylindrical segment **132** and a beveled segment **134**. Beveled top retaining spacer **130** is a section of cylindrical tubing cut and machined from a longer section of suitable stainless steel tubing so as to have cylindrical segment **132** and beveled segment **134**. Beveled top retaining spacer **130** is cut and machined so as to have an outer diameter (OD) which can be inserted into pipe **120** with substantially an interference fit.

[0051] A bevel is machined into the inside of the top **128** of pipe **120** to mate beveled segment **134**. Once beveled top retaining spacer **130** is inserted into pipe **120**, arrester **100** is placed in a press such that beveled top retaining spacer **130** is subject to pressure of 10,000 psi evenly around its circumference. Beveled top retaining spacer **130** is then tack welded to the inside of pipe **120** in at least four places around its circumference. Arrester **100** is then removed from the press by releasing pressure slowly.

[0052] A full penetration weld using suitable stainless steel wire is placed around the circumference of beveled top retaining ring **130** in the space between beveled segment **134** and the beveled inside of top **128** of pipe **120**. After welding, arrester **100** is placed on a lathe in order to machine the weld and both ends **126** and **128** of pipe **120**. In this way, beveled top retaining ring **130** may be considered “hidden” and coupled with bottom retaining ring **160**, securely retains

multifarious element **102** within pipe **120**. As such, there is no path provided for a flame to escape arrester **100** around beveled top retaining ring **130**.

[0053] Air or wind vanes **170** are then welded to the exterior of pipe **120** using supports **174**. Wind vanes **170** are known in the art and are commonly proprietary to a customer who specifies their geometry. As an example, wind vanes **170** of FIG. **5** include round holes **172**, collectively which allow air to pass and cool arrester **100**.

[0054] Completed arrester **100** is assigned a serial number which is also placed on the label permanently affixed to pipe **120**. In addition, the serial number for arrester **100** is tracked along with the customer purchase order and retained.

TESTING PROTOCOL

[0055] A proposed testing protocol is taken in part from the test procedures outlined in Appendix A of Subpart 154, of the USCG and the CSA-Z343 standards (each incorporated fully herein by reference) but modified to be applicable to the FABA-XT of the present disclosure.

[0056] The proposed performance tests are modeled after the endurance burn and deflagration tests for Type I detonation arresters. Although functionally the FABA-XT is like an end-of-line flame arrester, Appendix A test procedures were selected over the 33 C.F.R. § 154.828(b) procedures, because of the severity of the burner’s service and an abundance of conservatism. However, the detonation tests were not included, since the FABA-XT is an end-of-line device and there is no possibility of a detonation being generated without run-up piping.


[0057] Test Example 1 A flame arrester/burner of the design of the second preferred embodiment of FIGS. **5-11** was tested as follows.

| TEST INFORMATION | |
|--|---------------------------------|
| DESCRIPTION OF TEST: Burn Test | |
| DESIGN TEMPERATURE: N/A | DESIGN PRESSURE: Atm |
| TEST METHOD: Modified 33 CFR Appendix A Continuous Burn Test | |
| TEST FLUID: Gasoline/Air @14.7% | |
| TEST REQUIREMENTS | |
| ACTUAL TEST PRESSURE: Atm | TEST FLUID TEMPERATURE: ambient |
| TEST DURATION: See Strip Chart Table 1 | AMBIENT TEMPERATURE: 85° F. |
| 1 hour 12 Minutes | |
| TEST RESULTS: TABLE 1 | |
| START TIME: 13:41 | |
| FINISH TIME: 14:53 | |
| TEST EQUIPMENT | |
| TYPE: | RANGE: |
| Temp Strip Chart recorder | 0 to 2500° F. |
| CDI Air Mass flow meter | 0 to 100 CFM |
| Automizing nozzles for gas | 002 gpm @ 40 psi each |
| IR Video Camera | |

REMARKS:

Group C Crimp made by Paradox and pressed into housing between hidden retaining system with 5000 lbs. Uses 3 2inch elements with no gaps or screens.

TABLE 1. Results of Test Example 1.

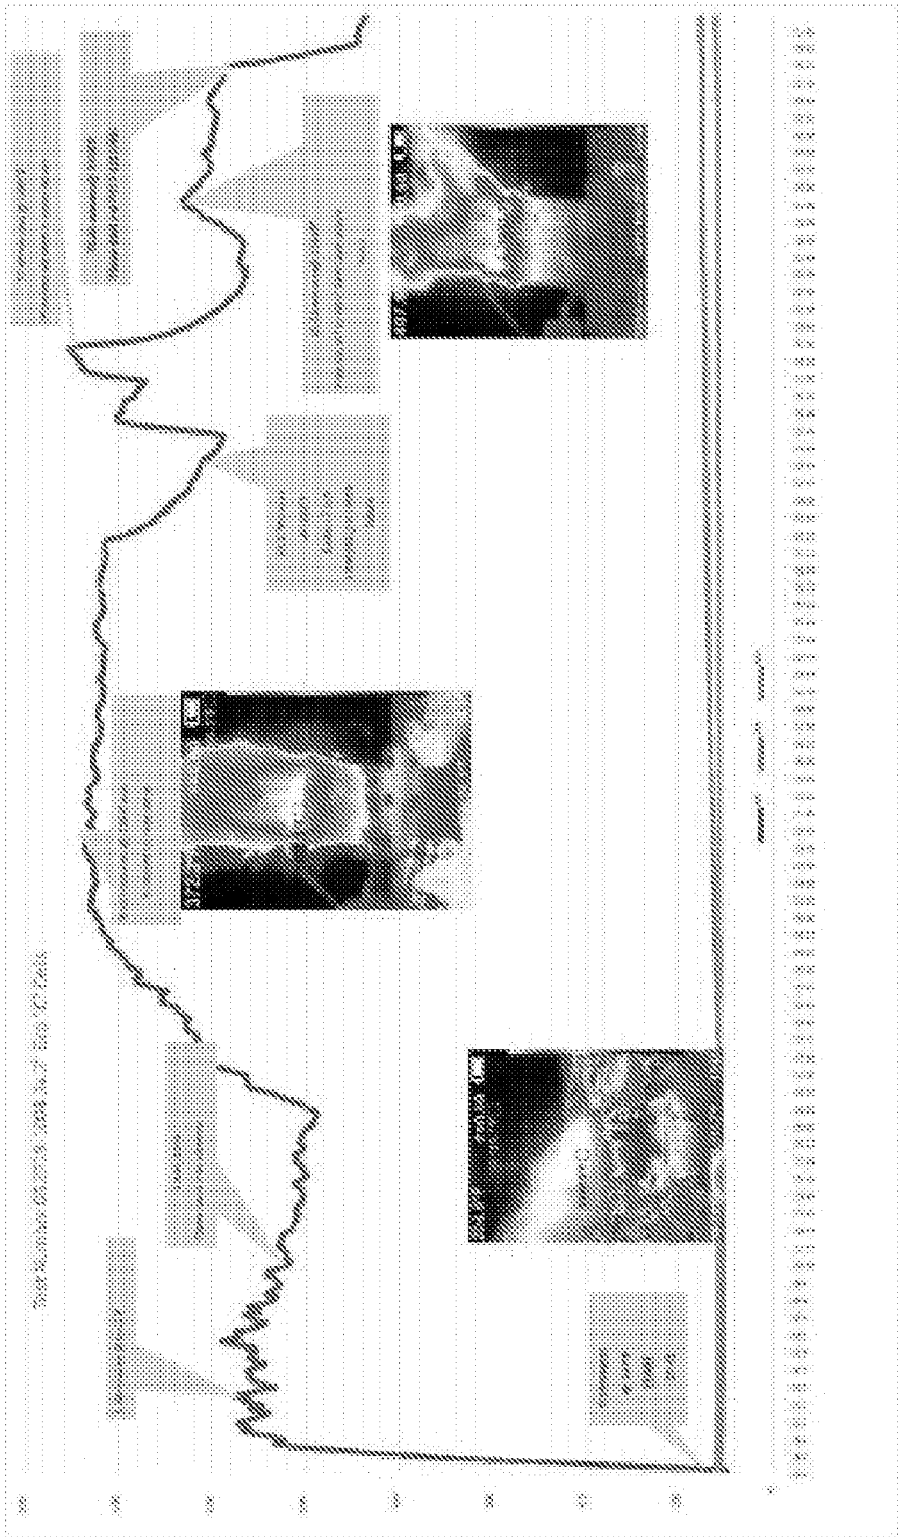

[0059] It is to be understood that the terms “including”, “comprising”, “consisting” and grammatical variants thereof do not preclude the addition of one or more components, features, steps, or integers or groups thereof and that the terms are to be construed as specifying components, features, steps or integers.

[0060] If the specification or claims refer to “an additional” element, that does not preclude there being more than one of the additional element.

[0061] It is to be understood that where the claims or specification refer to “a” or “an” element, such reference is not be construed that there is only one of that element.

[0062] It is to be understood that where the specification states that a component, feature, structure, or characteristic “may”, “might”, “can” or “could” be included, that particular component, feature, structure, or characteristic is not required to be included.

[0063] Where applicable, although state diagrams, flow diagrams or both may be used to describe embodiments, the invention is not limited to those diagrams or to the corresponding descriptions. For example, flow need not move through each illustrated box or state, or in exactly the same order as illustrated and described.

[0064] Methods of the present invention may be implemented by performing or completing manually, automatically, or a combination thereof, selected steps or tasks.

[0065] The term “method” may refer to manners, means, techniques and procedures for accomplishing a given task including, but not limited to, those manners, means, techniques and procedures either known to, or readily developed from known manners, means, techniques and procedures by practitioners of the art to which the invention belongs.

[0066] The term “at least” followed by a number is used herein to denote the start of a range beginning with that number (which may be a range having an upper limit or no upper limit, depending on the variable being defined). For example, “at least 1” means 1 or more than 1. The term “at most” followed by a number is used herein to denote the end of a range ending with that number (which may be a range having 1 or 0 as its lower limit, or a range having no lower limit, depending upon the variable being defined). For example, “at most 4” means 4 or less than 4, and “at most 40%” means 40% or less than 40%. Terms of approximation (e.g., “about”, “substantially”, “approximately”, etc.) should be interpreted according to their ordinary and customary meanings as used in the associated art unless indicated otherwise. Absent a specific definition and absent ordinary and customary usage in the associated art, such terms should be interpreted to be $\pm 10\%$ of the base value.

[0067] When, in this document, a range is given as “(a first number) to (a second number)” or “(a first number)-(a second number)”, this means a range whose lower limit is the first number and whose upper limit is the second number.

For example, 25 to 100 should be interpreted to mean a range whose lower limit is 25 and whose upper limit is 100. Additionally, it should be noted that where a range is given, every possible subrange or interval within that range is also specifically intended unless the context indicates to the contrary. For example, if the specification indicates a range of 25 to 100 such range is also intended to include subranges such as 26-100, 27-100, etc., 25-99, 25-98, etc., as well as any other possible combination of lower and upper values within the stated range, e.g., 33-47, 60-97, 41-45, 28-96, etc. Note that integer range values have been used in this paragraph for purposes of illustration only and decimal and fractional values (e.g., 46.7-91.3) should also be understood to be intended as possible subrange endpoints unless specifically excluded.

[0068] It should be noted that where reference is made herein to a method comprising two or more defined steps, the defined steps can be carried out in any order or simultaneously (except where context excludes that possibility), and the method can also include one or more other steps which are carried out before any of the defined steps, between two of the defined steps, or after all of the defined steps (except where context excludes that possibility).

[0069] Thus, the present invention is well adapted to carry out the objects and attain the ends and advantages mentioned above as well as those inherent therein. While presently preferred embodiments have been described for purposes of this disclosure, numerous changes and modifications will be apparent to those skilled in the art. Such changes and modifications are encompassed within the spirit of this invention as defined by the appended claims.

What is claimed is:

1. A flame arrester/burner assembly comprising all of the features and benefits set forth above.
2. A method of arranging the components of a flame arrester/burner assembly as set forth herein.
3. A multifarious element flame arrester, comprising:
 - a pipe body having a top end and bottom end;
 - a first arrester element positioned within said body adjacent said top end;
 - a third arrester element positioned within said body adjacent said bottom end;
 - a second arrester element positioned within said body between said first arrester element and said second arrester element.
4. The multifarious element flame arrester of claim 3 wherein said first, second, and third arrester elements are of the same design.
5. The multifarious element flame arrester of claim 3 wherein said first, second, and third arrester elements are of disparate designs.

* * * * *